

A
PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

ATTY DOCKET NO.: RAL9-99-0110

DATE: October 29, 1999

**UTILITY PATENT APPLICATION TRANSMITTAL LETTER
AND FEE TRANSMITTAL FORM (37 CFR 1.53(b))**

BOX PATENT APPLICATION

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is:

- ☒ a patent application
☐ a Continuation ☐ a Divisional ☐ a Continuation-in-Part (CIP)
of prior application no.: ; filed
☐ A Small Entity Statement(s) was filed in the prior application; Status still proper and desired.

Inventor(s) or Application Identifier:

Dongming Hwang, Cary, North Carolina; **Robert John Schule**, Cary, North Carolina; **Malcolm Scott Ware**, Raleigh, North Carolina; **Hua Ye**, Durham, North Carolina

Entitled: **METHODS, SYSTEMS AND COMPUTER PROGRAM PRODUCTS FOR CARRIER
DROP DETECTION USING A VARIABLE THRESHOLD**

Enclosed are:

1. ☒ Application Transmittal Letter and Fee Transmittal Form (*A duplicate is enclosed for fee processing*)
2. ☒ 24 pages of Specification (including 37 claims)
3. ☒ 5 sheets of Formal Drawings (35 USC 113)
4. ☒ Oath or Declaration
 - a. ☒ newly executed (*original or copy*)
 - b. ☐ copy from prior application (37 CFR 1.63(d) (*for continuation/divisional*) [Note Box 5 Below]
 - c. ☐ **DELETION OF INVENTOR(S)** (*Signed statement deleting inventor(s) named in the prior application*)
5. ☐ Incorporation By Reference (*useable if box 4b is checked*)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (*Appendix*)
7. ☒ Assignment papers (*cover sheet(s) and document(s)*)
8. ☐ Small Entity Statement(s)
9. ☐ Information Disclosure Statement, PTO-1449, and _____ references cited
10. ☐ Preliminary Amendment (*Please enter all claim amendments prior to calculating the filing fee.*)
11. ☐ English Translation Document
12. ☐ Certified Copy of _____ Application No. _____ ; Filed _____

In re: Hwang, et al.
Filed: October 29, 1999
Attorney Docket No. RAL9-99-0110


13. ☐ Sequence Listing/ Sequence Listing Diskette
a. ☐ computer readable copy
b. ☐ paper copy
c. ☐ statement in support
14. ☐ An Associate Power of Attorney
15. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
16. ☐ Other:

The fee has been calculated as shown below:

	Column 1 No. Filed	Column 2 No. Extra	Small Entity Rate Fee	Large Entity Rate Fee
BASIC FEE			\$380.00	\$760.00
TOTAL CLAIMS	37- 20 =	17	x 9 = \$	x 18 = \$306.00
INDEP CLAIMS	5 - 3 =	2	x 39 = \$	x 78 = \$156.00
<input type="checkbox"/> MULTIPLE Dependent Claims Presented			+ 130 = \$	+ 260 = \$
If the difference in Col. 1 is less than zero, Enter "0" in Col. 2			Total \$	Total \$1222.00

- ☐ A check in the amount of \$ _____ to cover the filing fee is enclosed.
☐ A check in the amount of \$ _____ is enclosed to cover the filing fee, PLUS the Assignment Recordation fee (\$40.00).
☒ Please charge my Deposit Account No. 09-0464 in the amount of \$1262.00 to cover the filing fee, PLUS the Assignment Recordation fee (\$40.00).
☐ Please charge my Deposit Account No. 09-0464 in the amount of \$ _____ to cover the filing fee.
☐ The Commissioner is hereby authorized to credit overpayments or charge the following fees associated with this communication to Deposit Account No. 09-0464.
a. ☐ Additional filing fees under 37 CFR 1.16 for presentation of extra claims.
b. ☐ Additional patent application processing fees under 37 CFR 1.17.

Respectfully submitted,



Robert W. Glatz
Registration No. 36,811

Myers Bigel Sibley & Sajovec
Post Office Box 37428
Raleigh, North Carolina 27627
Telephone (919) 854-1400
Facsimile (919) 854-1401

CERTIFICATE OF EXPRESS MAILING

Express Mail Label No. EL533386682US
Date of Deposit: October 29, 1999

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Box Patent Application, Assistant Commissioner For Patents, Washington, DC 20231.


Vickie Diane Prior
Date of Signature: October 29, 1999

METHODS, SYSTEMS AND COMPUTER PROGRAM PRODUCTS FOR CARRIER DROP DETECTION USING A VARIABLE THRESHOLD

Field of the Invention

The present invention relates generally to the field of modems, and, more particularly, to modem carrier drop detection.

Background of the Invention

The demand for remote access to information sources and data retrieval, as evidenced by the success of services such as the World Wide Web, is a driving force for high-speed network access technologies. Today's telephone network offers standard voice services over a 4 kHz bandwidth. Traditional analog modem standards generally assume that both ends of a modem communication session have an analog connection to the public switched telephone network (PSTN). Because data signals are typically converted from digital to analog when transmitted towards the PSTN and then from analog to digital when received from the PSTN, data rates may be limited to 33.6 kbps as defined in the V.34 transmission recommendation developed by the International Telecommunications Union (ITU).

The need for an analog modem can be eliminated, however, by using the basic rate interface (BRI) of the Integrated Services Digital Network (ISDN). A BRI offers end-to-end digital connectivity at an aggregate data rate of 160 kbps, which is comprised of two 64 kbps B channels, a 16 kbps D channel, and a separate maintenance channel. ISDN offers comfortable data rates for Internet access, telecommuting, remote education services, and some forms of video conferencing. ISDN deployment, however, has been very slow due to the substantial investment required of network providers for new equipment. Because ISDN is not very pervasive in the PSTN, the network providers have typically tarried ISDN services at relatively high rates, which may be ultimately passed on to the ISDN subscribers. In addition to the high service costs, subscribers must generally purchase or lease network

termination equipment to access the ISDN.

While most subscribers do not enjoy end-to-end digital connectivity through the PSTN, the PSTN is nevertheless mostly digital. Typically, the only analog portion of the PSTN is the phone line or local loop that connects a subscriber or client modem (*e.g.*, an individual subscriber in a home, office, or hotel) to the telephone company's central office (CO). In recent years, local telephone companies have been replacing portions of their original analog networks with digital switching equipment. Nevertheless, the connection between the home and the CO has been the slowest to change to digital as discussed in the foregoing with respect to ISDN BRI service. A recent data transmission recommendation issued by the ITU, known as V.90, takes advantage of the digital conversions that have been made in the PSTN. By viewing the PSTN as a digital network, V.90 technology is able to accelerate data downstream from the Internet or other information source to a subscriber's computer at data rates of up to 56 kbps, even when the subscriber is connected to the PSTN via an analog local loop.

To understand how the V.90 recommendation achieves this higher data rate, it may be helpful to briefly review the operation of V.34 analog modems. V.34 modems are optimized for the situation where both ends of a communication session are connected to the PSTN by analog lines. Even though most of the PSTN is digital, V.34 modems treat the network as if it were entirely analog. Moreover, the V.34 recommendation assumes that both ends of the communication session suffer impairment due to quantization noise introduced by analog-to-digital converters. That is, the analog signals transmitted from the V.34 modems are sampled at 8000 times per second by a codec upon reaching the PSTN with each sample being represented or quantized by an eight-bit pulse code modulation (PCM) codeword. The codec uses 256, non-uniformly spaced, PCM quantization levels defined according to either the μ -law or A-law companding standard (*ie.*, the ITU G.711 Recommendation).

Because the analog waveforms are continuous and the binary PCM codewords are discrete, the digits that are sent across the PSTN can only approximate the original analog waveform. The difference between the original analog waveform and the reconstructed quantized waveform is called quantization noise, which limits the modem data rate.

While quantization noise may limit a V.34 communication session to 33.6 kbps, it nevertheless affects only analog-to-digital conversions. The V.90 standard relies on the lack

of analog-to-digital conversions outside of the conversion made at the subscriber's modem to enable transmission at 56 kbps.

The general environment for which the V.90 standard was developed is depicted in **FIG. 1**. An Internet Service Provider (ISP) **22** is connected to a subscriber's computer **24** via a V.90 digital server modem **26**, through the PSTN **28** via digital trunks (e.g., T1, E1, or ISDN Primary Rate Interface (PRI) connections), through a central office switch **32**, and finally through an analog loop to the client's modem **34**. The central office switch **32** is drawn outside of the PSTN **28** to better illustrate the connection of the subscriber's computer **24** and modem **34** into the PSTN **28**. It should be understood that the central office **32** is, in fact, a part of the PSTN **28**. The operation of a communication session between the subscriber **24** and an ISP **22** is best described with reference to the more detailed block diagram of **FIG. 2**.

Transmission from the server modem **26** to the client modem **34** will be described first. The information to be transmitted is first encoded using only the 256 PCM codewords used by the digital switching and transmission equipment in the PSTN **28**. These PCM codewords are transmitted towards the PSTN by the PCM transmitter **6** where they are received by a network codec. The PCM data is then transmitted through the PSTN **28** until reaching the central office **32** to which the client modem **34** is connected. Before transmitting the PCM data to the client modem **34**, the data is converted from its current form as either μ -law or A-law companded PCM codewords to pulse amplitude modulated (PAM) voltages by the codec expander (digital-to-analog (D/A) converter) **38**.

These PAM voltage levels are processed by a central office hybrid **42** where the unidirectional signal received from the codec expander **38** is transmitted towards the client modem **34** as part of a bidirectional signal. A second hybrid **44** at the subscriber's analog telephone connection converts the bidirectional signal back into a pair of unidirectional signals. Finally, the analog signal from the hybrid **44** is converted into digital PAM samples by an analog-to-digital (A/D) converter **46**, which are received and decoded by the PAM receiver **48**. Note that for transmission to succeed effectively at 56 kbps, there must be only a single digital-to-analog conversion and subsequent analog-to-digital conversion between the server modem **26** and the client modem **34**. Recall that analog-to-digital conversions in the PSTN **28** can introduce quantization noise, which may limit the data rate as discussed

hereinbefore. The A/D converter 46 at the client modem 34, however, may have a higher resolution than the A/D converters used in the analog portion of the PSTN 28 (e.g., 16 bits versus 8 bits), which results in less quantization noise. Moreover, the PAM receiver 48 needs to be in synchronization with the 8 kHz network clock to properly decode the digital PAM samples.

Transmission from the client modem 34 to the server modem 26 follows the V.34 data transmission standard. That is, the client modem 34 includes a V.34 transmitter 52 and a D/A converter 54 that encode and modulate the digital data to be sent using techniques such as quadrature amplitude modulation (QAM). The hybrid 44 converts the unidirectional signal from the digital-to-analog converter 54 into a bidirectional signal that is transmitted to the central office 32. Once the signal is received at the central office 32, the central office hybrid 42 converts the bidirectional signal into a unidirectional signal that is provided to the central office codec. This unidirectional, analog signal is converted into either μ -law or A-law companded PCM codewords by the codec compressor (A/D converter) 56, which are then transmitted through the PSTN 28 until reaching the server modem 26. The server modem 26 includes a conventional V.34 receiver 58 for demodulating and decoding the data sent by the V.34 transmitter 52 in the client modem 34. Thus, data is transferred from the client modem 34 to the server modem 26 at data rates of up to 33.6 kbps as provided for in the V.34 standard.

The V.90 standard only offers increased data rates (e.g., data rates up to 56 kbps) in the downstream direction from a server to a subscriber or client. Upstream communication still takes place at conventional data rates as provided for in the V.34 standard. Nevertheless, this asymmetry is particularly well suited for Internet access. For example, when accessing the Internet, high bandwidth is most useful when downloading large text, video, and audio files to a subscriber's computer. Using V.90, these data transfers can be made at up to 56 kbps. On the other hand, traffic flow from the subscriber to an ISP consists of mainly keystroke and mouse commands, which are readily handled by the conventional rates provided by the V.34 standard.

The V.90 standard, therefore, provides a framework for transmitting data at rates up to 56 kbps provided the network is capable of supporting the higher rates. The most notable requirement is that there can be at most one digital-to-analog conversion and no analog-to-

digital conversion in the downstream path within the network. Nevertheless, other digital impairments, such as robbed bit signaling (RBS) and digital mapping through PADs which results in attenuated signals, can also inhibit transmission at V.90 rates. Communication channels exhibiting non-linear frequency response characteristics are yet another impediment to transmission at the V.90 rates. Moreover, these other factors may limit conventional V.90 performance to less than the 56 kbps theoretical data rate.

Articles such as Humblet *et al.*, "The Information Driveway," IEEE Communications Magazine, December 1996, pp. 64-68, Kalet *et al.*, "The Capacity of PCM Voiceband Channels," IEEE International Conference on Communications '93, May 23-26, 1993, Geneva, Switzerland, pp. 507-511, Fischer *et al.*, "Signal Mapping for PCM Modems," V-pcm Rapporteur Meeting, Sunriver, Oregon, USA, September 4-12, 1997, and Proakis, "Digital Signaling Over a Channel with Intersymbol Interference," Digital Communications, McGraw-Hill Book Company, 1983, pp. 373, 381, provide general background information on digital communication systems.

Various modem protocols include startup phases which, in practice, are implemented using, carrier drop detection. For example, the V.90 standard, along with other standards, such as the V.34 standard, begin startup operations with phase 1 procedures classified as network interaction. The phase 1 network interaction segment of startup operations is followed by the phase 2 operations classified as channel probing and ranging. Additional procedures are defined for phase 2 and phase 3 under the V.90 standard. At various points in the startup procedures for V.90 and other modem protocols, carrier drop detection may be utilized to transition the client and server modems to transition to subsequent operations. The transitions may include reconfiguration of receivers and/or other related operations.

It is known to provide modems with carrier detectors as described, for example in United States Patent Nos. 5,563,908 and 5,625,643. These disclosures relate to use of an energy detector as a carrier detector and further using a fixed threshold to recognize carrier drop. These references further discuss an implementation of such a detector which is directed towards improving performance when the signal is subject to effects such as time dispersion. More particularly, a tone signal is appended to the data transmission, the tone signal being used to detect the absence of a carrier indicating the end of the data transmission.

However, many of the proposed protocols preclude the use of such an appended tone

and alternative approaches to improving reliability of carrier drop detection for such systems are needed. One proposed approach to carrier drop detection is described in United States Patent No. 5,815,534 entitled "Detector of Carrier Loss in a Fax Modem" (the '534 patent). The '534 patent discusses a carrier loss detector which utilizes a variable threshold rather than a fixed threshold to detect the end of a page of a fax transmission. A particular frequency pattern associated with a phase of a transmission pursuant to the V.27 standard is used to initiate updating of the threshold input to the carrier loss detection circuit. For example, in one embodiment of the '534 patent, the update is initiated based on a comparison of the magnitude of an unfiltered carrier signal to the magnitude of a filtered version with the filtering selected to cause a deviation between the signals during the phase with a particular associated frequency pattern. As with the approach of adding a tone, such an identifiable frequency pattern is not always available at the points where carrier drop detection is required under various modem communication standards such as V.90. Accordingly, improved carrier drop detection would be beneficial for use under such conditions.

Summary of the Invention

It is an object of the present invention to provide methods, systems and computer program products which may more reliably detect carrier drop in a modem.

It is a further object of the present invention to provide such methods, systems and computer program products which may be tolerant of variations in line conditions and carrier signal levels.

These and other objects, advantages, and features of the present invention are provided by methods, systems and computer program products which utilize a variable threshold for carrier drop detection. The carrier drop detection threshold is updated based on a recognized data sequence (signal data) contained within the signal received by the modem. The received signal is demodulated to obtain the signal data and an updated threshold is latched when a desired data sequence is recognized in the demodulated data. Accordingly, the threshold may be updated and set as an offset from or a percentage of the carrier signal level at the time of receipt of the desired data sequence. For example, in a V.90 modem using a V.8 phase 1 sequence, receipt of the CM signal (for the answer modem) or the JM signal (for the call modem) may be used to latch an updated level for the carrier drop

detection threshold, which may then be used for detecting carrier drop during the silence transmission at the end of phase 1 to allow reliable preparation of the modem for receipt of the INFO0 signal at the start of phase 2.

In one embodiment of the present invention, a method for modem carrier drop detection is provided including demodulating a received signal to provide signal data and updating a carrier drop detection threshold based on the received signal responsive to a selected data pattern in the signal data. A carrier drop is then detected based on the carrier drop detection threshold. In one embodiment, the modem uses a V.8 standard during startup and the carrier drop detection threshold is updated responsive to a selected data pattern in the signal data corresponding to at least one of a CM signal and a JM signal.

In a further embodiment of the present invention, carrier drop detection operations include setting a flag to indicate receipt of at least one of a valid CM signal and a valid JM signal and latching an output of a signal strength detector responsive to setting of the flag, the signal strength detector being coupled to the received signal and the output of the signal strength detector corresponding to a signal strength level of the received signal. The carrier drop detection threshold is then set to a value a predetermined amount below the latched output of the signal strength detector responsive to setting of the flag. The signal strength detector may be a magnitude detector or an energy detector. The carrier drop detection threshold is preferably set to a level about 4 dB below the latched output of the energy detector responsive to setting of the flag. The flag may be set by setting a predetermined memory location as the flag or, alternatively, by setting a latch output line to an active state.

In another embodiment of the present invention, a carrier drop is detected corresponding to a silence transmission terminating a V.8 standard phase 1. The modem is then conditioned to receive a phase 2 INFO0 signal. The modem may be conditioned by starting a differential phase shift keyed (DPSK) receiver that receives the INFO0 signal.

In a further aspect of the present invention, a carrier drop detection system is provided including a demodulator that demodulates a received signal to provide signal data and a threshold circuit coupled to the demodulator that latches a carrier drop detection threshold at a level based on the received signal responsive to a selected data pattern in the signal data. A carrier drop detection circuit coupled to the threshold circuit detects a carrier drop based on the carrier drop detection threshold. The demodulator may be a frequency shift keyed (FSK)

demodulator. In one embodiment, the carrier drop detection circuit includes an energy detector having an output corresponding to an energy level of the received signal, the output of the energy detector being latched responsive to the selected data pattern in the signal data and a comparator coupled to the output of the energy detector and to the carrier drop
5 detection threshold. The selected data pattern in the data signal may be at least one of a CM signal and a JM signal. In one embodiment, the threshold circuit further includes a combiner coupled to the output of the energy detector and an offset that outputs the carrier drop detection threshold as the latched output of the energy detector reduced by the offset. In an alternative embodiment, the threshold circuit further includes a multiplier coupled to the
10 output of the energy detector and a coefficient that outputs the carrier drop detection threshold as the latched output of the energy detector multiplied by the coefficient.

In a further embodiment of the present invention, a carrier drop detection system for a V.8 standard modem startup sequence is provided including a receiver circuit that receives a signal and a detector circuit coupled to the receiver circuit that detects at least one of a CM
15 signal and a JM signal from the received signal. A signal strength detection circuit coupled to the receiver outputs a received signal strength for the received signal. A threshold circuit coupled to the receiver circuit latches a carrier drop detection threshold based on a current value of the received signal strength responsive to detection of at least one of the CM and the JM signal by the receiver circuit. A comparator circuit coupled to the threshold circuit and
20 the signal strength detection circuit compares the received signal strength to the carrier drop detection threshold to detect a carrier drop corresponding to an end of the startup sequence.

As will further be appreciated by those of skill in the art, while described above primarily with reference to method aspects, the present invention may be embodied as methods, apparatus/systems and/or computer program products.

Brief Description of the Drawings

Other features of the present invention will be more readily understood from the following detailed description of specific embodiments thereof when read in conjunction with the accompanying drawings, in which:

30 **FIG. 1** is block diagram illustrating a typical V.90 connection between a subscriber and an ISP in accordance with the prior art;

FIG. 2 is a detailed block diagram of the internal architecture and connections between the client modem, the central office, and the server modem of **FIG. 1**;

FIG. 3 is a block diagram of a carrier drop detection system for a modem in accordance with an embodiment of the present invention;

FIG. 4 is a signal sequencing diagram illustrating the exchange of messages and tones between a server modem and a client modem during phase 1 and part of phase 2 operations pursuant to the V.90 standard; and

FIG. 5 is a flowchart illustrating operations of a carrier drop detection system shown in **FIG. 3**.

Detailed Description of the Preferred Embodiments

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like reference numbers signify like elements throughout the description of the figures.

As will be appreciated by those skilled in the art, the present invention can be embodied as a method, a system, or a computer program product. Accordingly, the present invention can take the form of an entirely hardware embodiment, an entirely software (including firmware, resident software, micro-code, *etc.*) embodiment, or an embodiment containing both software and hardware aspects. Furthermore, the present invention can take the form of a computer program product on a computer-usable or computer-readable storage medium having computer-usable program code means embodied in the medium for use by or in connection with an instruction execution system. In the context of this document, a computer-usable or computer-readable medium can be any means that can contain, store, communicate, propagate, or transport the program for use by or in connection with the instruction execution system, apparatus, or device.

The computer-usable or computer-readable medium can be, for example but not limited to, an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor

system, apparatus, device, or propagation medium. More specific examples (a nonexhaustive list) of the computer-readable medium would include the following: an electrical connection having one or more wires, a portable computer diskette, a random access memory (RAM), a read-only memory (ROM), an erasable programmable read-only memory (EPROM or Flash memory), an optical fiber, and a portable compact disc read-only memory (CDROM). Note that the computer-usable or computer-readable medium could even be paper or another suitable medium upon which the program is printed, as the program can be electronically captured, via, for instance, optical scanning of the paper or other medium, then compiled, interpreted or otherwise processed in a suitable manner if necessary, and then stored in a computer memory.

Computer program code for carrying out operations of the present invention is typically written in a high level programming language such as C or C++. Nevertheless, some modules or routines may be written in assembly or machine language to optimize speed, memory usage, or layout of the software or firmware in memory. Assembly language is typically used to implement time-critical code segments.

The present invention will now be further described with reference to the block diagram illustration of an embodiment of a carrier drop detection system of **FIG. 3**. As shown in the embodiment of **FIG. 3**, the carrier drop detection system **290** includes the receiver **300** which receives a signal input, such as over a Public Switched Telephone Network (PSTN), and outputs a received signal **302**. The received signal **302** is provided to the demodulator **305** and to the signal strength detector circuit **315** which is contained within the carrier drop detection circuit **310**. The carrier drop detection circuit **310** further includes a comparator **320** which outputs the carrier drop signal **345**. The signal strength output **325** of the signal strength detector **315** is provided to the comparator **320** and also to the threshold circuit **335**.

The demodulator **305** demodulates the received signal **302** to provide signal data **330**. The threshold circuit **335** receives the signal data **330** from the demodulator **305** and latches a carrier drop detection threshold **337** at a level based on the signal strength **325** of the received signal **302** responsive to detection of a selected data pattern in the signal data **330**. The carrier drop detection circuit **310** detects carrier drop with reference to the carrier drop detection threshold **337** and the signal strength **325**.

Also shown in threshold circuit 335 is an offset 340 which may be an offset value used by the threshold circuit 335 to reduce the value of a signal strength 325 latched by the threshold circuit 335 to arrive at the carrier drop detection threshold 337. Alternatively, the offset 340 may be a coefficient and the carrier drop detection threshold 337 may be the latched value of the signal strength 325 multiplied by the coefficient. Accordingly, depending upon the embodiment as described above, the threshold circuit 335 may further include either a combiner (not shown) that outputs the carrier drop detection threshold 337 as the latched value of the signal strength 325 from the signal strength detector circuit 315 reduced by the offset 340 or a multiplier (not shown) that outputs the carrier drop detection threshold 337 as the latched value of the signal strength 325 multiplied by the coefficient.

The present invention will now be further described within the context of a particular embodiment directed to detection of the phase 1 to phase 2 transition for a V.90 (or V.34) client or analog modem. In particular, detection of the INFO0 signal at the start of phase 2 for a V.90 modem may be difficult in that the INFO0 signal in phase 2 is typically sent only once following the completion of phase 1 of the startup protocol. If for some reason, such as signal noise, the INFO0 signal is not received within the time window allowed for the INFO0 signal reception, a V.90 modem typically must time out and perform an error recovery procedure where the transmitter continuously sends the INFO0 signal to the remote modem and the receiver similarly continuously tries to detect the INFO0 signal coming from the remote modem. Accordingly, performance may be improved by reliable detection of the INFO0 signal initially without the use of an INFO0 recovery procedure. One approach to this problem is to provide a robust receiver for the INFO0 signal which, typically, is received by a differential phase shift keyed (DPSK) receiver. Alternatively, or an addition to the use of such a robust receiver, the phase 1 to phase 2 transition may be accurately and reliably detected to improve performance. Carrier drop detection methods, systems and computer program products according to the present invention are particularly beneficial for applications such as the detection of the phase 1 to phase 2 transition as will now be further described with reference to FIG. 4.

Tone and message transmissions with their respective relative timing for the server modem and the client modem are illustrated in FIG. 4. In the illustration of FIG. 4, the client/analog modem acts as the call modem which transmits CI (or CT or CNG) and

conditions its receiver to detect the answer signal ANSam (or ANS) as per the V.8 protocol recommendation. After the signal ANSam is detected, the call modem transmits silence for the period T_e . The call modem then conditions its receiver to detect JM and transmits the signal CM with the appropriate bit set to indicate that V.90 operation is desired. When a minimum of two identical JM sequences have been received, the call modem completes the current CM octet and sends CJ. After sending CJ, the call modem transmits silence for 75 milliseconds plus or minus 5 milliseconds before proceeding with the phase 2 signal procedures. As shown in **FIG. 4**, the phase 2 signals from the call modem begin with transmission of the INFO0 signal.

The answer (or server/digital) modem, as illustrated in **FIG. 4**, transmits the ANSam signal and conditions its receiver to receive CM. After two identical CM sequences are received with the appropriate bit set to indicate V.90 operation, the answer modem sends JM and conditions its receiver to detect CJ. After receiving the three specified octets of CJ, the answer modem transmits silence for 75 milliseconds plus or minus 5 milliseconds and proceeds with phase 2 of the startup procedures.

During the 75 millisecond silence period ending phase 1, both the call modem and answer modem start their INFO0 DPSK receivers to detect the INFO0 signal. For example, with reference to the call modem side, as soon as the detection of the JM signal is completed, the V.8 supporting circuitry of the call modem starts to monitor for carrier drop of the phase 1 signal (specified pursuant to the V.21 protocol recommendation). On detection of the carrier drop, the V.8 circuitry of the call modem signals to the rest of the modem system that the phase 1 receiving task is completed and the 75 millisecond silence period has started. The DPSK INFO0 receiver then begins operation. In known V.90 modems, an absolute carrier drop threshold is compared with an energy detector output and, once the energy detector output drops below the set carrier drop threshold, carrier drop is said to be detected.

While an absolute carrier drop may work well under normal line conditions, trouble may result under various line conditions which can cause a wrong start time for the INFO0 DPSK receiver which in turn results in a failure to detect the original INFO0 signal and the need to enter INFO0 error recovery procedures. For example, under noisy line conditions, it may be difficult to reliably and repeatedly detect carrier drop. This is particularly difficult in contexts such as the V.90 sequence described above as the transmissions during which carrier

drop detection is applied are "silence" conditions and it is generally hard to establish a fixed threshold for detection of carrier drop during a silence period. This problem is further magnified by the relatively short duration of the 75 millisecond silence period between phase 1 and phase 2. As a result of this short period, it is possible with prior approaches that the carrier detector output may not even have an opportunity to drop, i.e., to reach the threshold for drop detection, within the 75 millisecond time frame, which results in a failure to detect carrier drop. Also, as the phase 2 INFO0 signal is inband to the V.21 reception, the echo of the INFO0 signal itself could also disturb the carrier detector's energy output. Accordingly, the present invention provides for establishment of a relative threshold for use in detecting the phase 1 to phase 2 transition. As will be described further herein, the present invention utilizes recognition of receipt of the CM and/or JM signal respectively, depending upon whether it is the call modem or the answer modem, to initiate updating of the carrier threshold.

Referring again to **FIG. 3**, the illustrated embodiment of the present invention will be further described with reference to the application and detection of carrier drop between phase 1 and phase 2 for a V.90 modem. For this embodiment, the demodulator **305** may be a frequency shift keyed (FSK) demodulator as phase 1, pursuant to the V.8 standard recommendation, includes transmissions of CM (or JM) packets containing one and zero patterns modulated using V.21 standard FSK modulation. While such signals typically cannot be detected through the use of tone detection, they may be recognized through demodulation and comparison to the expected associated patterns pursuant to the V.8 standard. In addition, the signal strength detector **315** is preferably an energy detector which is configured to detect an energy level of the received signal **302**. While it is possible to utilize a signal strength detector **315** which is a magnitude type detector, it is preferable that an energy detector be utilized in accordance with the present invention. Furthermore, as described previously with reference to **FIG. 4**, the threshold circuit **335** latches the output of the signal strength detector **315** on recognition of at least one of the CM signal or the JM signal as the selected data pattern in the data signal **330**. Accordingly, the threshold circuit **335** further comprises a detector circuit which is coupled to the receiver **300** through the demodulator **305** so as to detect at least one of the CM signal or the JM signal.

It is further to be understood that while the receiver **300** and the modulator **305** are illustrated as separate blocks in **FIG. 3** they may be combined. Similarly, other blocks or combinations of blocks in **FIG. 3** may be implemented in whole or in part as code executing on a processor, in custom chips, in discrete devices or as a combination of the above.

Operations according to the present invention will now be further described with reference to the embodiment illustrated in the flow chart of **FIG. 5**. As shown in **FIG. 5**, operations begin at block **500** with receipt of the signal by the modem including the carrier drop detection system **290**. The received signal is demodulated to provide signal data (block **505**). As will be described further with reference to blocks **510** through **525**, a carrier drop detection threshold is updated based on the received signal responsive to a selected data pattern in the signal data.

As the illustrated embodiment of **FIG. 5** relates to detection of the phase 1 to phase 2 transition for a modem using a V.8 standard during startup, the signal data from block **505** is evaluated to detect a selected data pattern in the signal data corresponding to at least one of a CM signal or a JM signal depending upon whether the modem is acting as the call modem or the answer modem (block **510**). If a CM or JM signal is not received, operations return to block **500**. Once a CM or a JM signal is detected (block **510**), a flag is set to indicate to the rest of the modem system that a valid CM or JM has been received (block **515**). The phase 1 V.21 standard receiver (not shown) within the circuitry of the threshold circuit **335** latches the output of the signal strength (energy) detector **315** (block **520**). Accordingly, the current output of the energy detector **315** is latched responsive to setting of the flag indicating receipt of a valid CM or JM signal.

The carrier drop detection threshold **337** is then set to a value a predetermined amount below the last output of the signal strength detector **315** responsive to the setting of the flag (block **525**). In one embodiment of the present invention, the relative threshold value for the carrier drop detection threshold **337** is set to a level four dB (decibels) below that of the latched output of the signal strength detector **315**. Subsequently, on receipt of the silence transmission between phase 1 and phase 2, a carrier drop is detected when the output of the signal strength (energy) detector **315** drops below the updated threshold as detected by the comparator **320** (block **530**). Finally, following detection of a carrier drop (block **530**), the modem is conditioned to receive the phase 2 INFO0 signal (block **535**). More particularly,

the conditioning operations at block 535 may include starting a Differential Phase Shift Keyed (DPSK) receiver to receive the INFO0 signal.

In a preferred embodiment, the flag set operations at block 515 comprise setting a predetermined memory location as the flag which memory location is accessible to the various program code modules executing on the modem. Alternatively, operations at block 515 can utilize a hardware connection where setting of the flag comprises setting a latched output line to an active state to initiate latching operations as described above.

The systems, methods and computer program products according to the present invention provide for the use of an updated or relative carrier drop threshold. As a result, modem transition timing, such as the phase 1 to phase 2 transition timing for V.90 modem, may be more reliably detected across a variety of line conditions. The present invention may, thereby, provide for improved reliability of operations following carrier drop detection, such as the detection of the phase 2 INFO0 signal in a V.90 (or a V.34) modem.

The present invention has been described above with reference to the block diagram illustration of FIG 3. and the flowchart illustration of FIG 4. It will be understood that each block of the flowchart illustrations and/or block diagrams, and combinations of blocks in the flowchart illustrations and/or block diagrams, can be implemented by computer program instructions. These program instructions may be provided to a processor to produce a machine, such that the instructions which execute on the processor create means for implementing the functions specified in the flowchart or block diagram block or blocks. The computer program instructions may be executed by a processor to cause a series of operational steps to be performed by the processor to produce a computer implemented process such that the instructions which execute on the processor provide steps for implementing the functions specified in the flowchart or block diagram block or blocks.

Accordingly, blocks of the block diagrams and/or flowchart illustrations support combinations of means for performing the specified functions, combinations of steps for performing the specified functions and program instruction means for performing the specified functions. It will also be understood that each block of the block diagrams and/or flowchart illustrations, and combinations of blocks in the block diagrams and/or flowchart illustrations, can be implemented by special purpose hardware-based systems which perform

the specified functions or steps, or combinations of special purpose hardware and computer instructions.

It should also be noted that, in some alternative implementations, the functions noted in the blocks may occur out of the order noted in the figures. For example, two blocks shown in succession may in fact be executed substantially concurrently or the blocks may sometimes be executed in the reverse order, depending upon the functionality involved.

While the present invention has been illustrated and described in detail in the drawings and foregoing description, it is understood that the embodiments shown are merely exemplary. Moreover, it is to be understood that many variations and modifications can be made to the embodiments described herein above without substantially departing from the principles of the present invention. All such variations and modifications are intended to be included herein within the scope of the present invention, as set forth in the following claims.

Claims

We claim:

1. A method for modem carrier drop detection comprising the steps of:
demodulating a received signal to provide signal data;
updating a carrier drop detection threshold based on the received signal
responsive to a selected data pattern in the signal data; and
5 detecting a carrier drop based on the carrier drop detection threshold.
2. A method according to Claim 1 wherein the modem uses a V.8
standard during startup and the step of updating comprises the step of updating the carrier
drop detection threshold responsive to a selected data pattern in the signal data corresponding
to at least one of a CM signal and a JM signal.
3. A method according to Claim 1 wherein the updating step further
comprises the steps of:
setting a flag to indicate receipt of at least one of a valid CM signal and a valid
JM signal;
5 latching an output of a signal strength detector responsive to setting of the
flag, the signal strength detector being coupled to the received signal and the output of the
signal strength detector corresponding to a signal strength level of the received signal; and
setting the carrier drop detection threshold to a value a predetermined amount
below the latched output of the signal strength detector responsive to setting of the flag.
4. A method according to Claim 3 wherein the signal strength detector is
a magnitude detector.
5. A method according to Claim 3 wherein the signal strength detector is
an energy detector.
6. A method according to Claim 5 wherein the setting step further
comprises the step of setting the carrier drop detection threshold to a level about 4 dB below

the latched output of the energy detector responsive to setting of the flag.

7. A method according to Claim 3 wherein the detecting a carrier drop step further comprises the step of detecting a carrier drop corresponding to a silence transmission terminating a V.8 standard phase 1 and wherein the detecting a carrier drop step is followed by the step of conditioning the modem to receive a phase 2 INFO0 signal.

8. A method according to Claim 7 wherein the conditioning step further comprises the step of starting a differential phase shift keyed (DPSK) receiver that receives the INFO0 signal.

9. A method according to Claim 3 wherein the step of setting a flag further comprises setting a predetermined memory location as the flag.

10. A method according to Claim 3 wherein the step of setting a flag further comprises the step of setting a latch output line to an active state.

11. A carrier drop detection system comprising:
a demodulator that demodulates a received signal to provide signal data;
a threshold circuit coupled to the demodulator that latches a carrier drop detection threshold at a level based on the received signal responsive to a selected data pattern in the signal data; and
a carrier drop detection circuit coupled to the threshold circuit that detects a carrier drop based on the carrier drop detection threshold.

12. A carrier drop detection system according to Claim 11 wherein the demodulator is a frequency shift keyed (FSK) demodulator.

13. A carrier drop detection system according to Claim 12 wherein the carrier drop detection circuit further comprises:
an energy detector having an output corresponding to an energy level of the

received signal, the output of the energy detector being latched responsive to the selected data
5 pattern in the signal data; and

a comparator coupled to the output of the energy detector and to the carrier
drop detection threshold.

14. A carrier drop detection system according to Claim 13 wherein the
threshold circuit further comprises a combiner coupled to the output of the energy detector
and an offset that outputs the carrier drop detection threshold as the latched output of the
energy detector reduced by the offset.

15. A carrier drop detection system according to Claim 13 wherein the
threshold circuit further comprises a multiplier coupled to the output of the energy detector
and a coefficient that outputs the carrier drop detection threshold as the latched output of the
energy detector multiplied by the coefficient.

16. A carrier detection system according to Claim 14 wherein the selected
data pattern in the data signal is at least one of a CM signal and a JM signal.

17. A carrier drop detection system for a V.8 standard modem startup
sequence, the system comprising:

a receiver circuit that receives a signal;

a detector circuit coupled to the receiver circuit that detects at least one of a
5 CM signal and a JM signal from the received signal;

a signal strength detection circuit coupled to the receiver that outputs a
received signal strength for the received signal;

a threshold circuit coupled to the receiver circuit that latches a carrier drop
detection threshold based on a current value of the received signal strength responsive to
10 detection of at least one of the CM and the JM signal by the receiver circuit; and

a comparator circuit coupled to the threshold circuit and the signal strength
detection circuit that compares the received signal strength to the carrier drop detection
threshold to detect a carrier drop corresponding to an end of the startup sequence.

18. A carrier drop detection system comprising:
means for demodulating a received signal to provide signal data;
means for updating a carrier drop detection threshold based on the received
signal responsive to a selected data pattern in the signal data; and
5 means for detecting a carrier drop based on the carrier drop detection
threshold.

19. A system according to Claim 18 wherein the modem uses a V.8
standard during startup and the means for updating comprises means for updating the carrier
drop detection threshold responsive to a selected data pattern in the signal data corresponding
to at least one of a CM signal and a JM signal.

20. A system according to Claim 18 wherein the means for updating
further comprises:
means for setting a flag to indicate receipt of at least one of a valid CM signal
and a valid JM signal;
5 a signal strength detector coupled to the received signal and having an output
corresponding to a signal strength level of the received signal;
means for latching an output of the signal strength detector responsive to
setting of the flag; and
means for setting the carrier drop detection threshold to a value a
10 predetermined amount below the latched output of the signal strength detector responsive to
setting of the flag.

21. A system according to Claim 20 wherein the signal strength detector is
a magnitude detector.

22. A system according to Claim 20 wherein the signal strength detector is
an energy detector.

23. A system according to Claim 22 wherein the means for setting further comprises means for setting the carrier drop detection threshold to a level about 4 dB below the latched output of the energy detector responsive to setting of the flag.

24. A system according to Claim 20 wherein the means for detecting a carrier drop further comprises means for detecting a carrier drop corresponding to a silence transmission terminating a V.8 standard phase 1 and further comprising means for conditioning the modem to receive a phase 2 INFO0 signal.

25. A system according to Claim 24 wherein the means for conditioning further comprises means for starting a differential phase shift keyed (DPSK) receiver that receives the INFO0 signal.

26. A system according to Claim 20 wherein the means for setting a flag further comprises means for setting a predetermined memory location as the flag.

27. A system according to Claim 20 wherein the means for setting a flag further comprises means for setting a latch output line to an active state.

28. A computer program product for carrier drop detection, comprising:
a computer readable storage medium having computer readable program code means embodied therein, the computer readable code means comprising:
computer readable code which demodulates a received signal to provide signal data;
computer readable code which updates a carrier drop detection threshold based on the received signal responsive to a selected data pattern in the signal data; and
computer readable code which detects a carrier drop based on the carrier drop detection threshold.

29. A computer program product according to Claim 28 wherein the

modem uses a V.8 standard during startup and the computer readable code which updates
comprises computer readable code which updates the carrier drop detection threshold
responsive to a selected data pattern in the signal data corresponding to at least one of a CM
5 signal and a JM signal.

30. A computer program product according to Claim 18 wherein the
computer readable code which updates further comprises:
computer readable code which sets a flag to indicate receipt of at least one of a
valid CM signal and a valid JM signal;

5 computer readable code which outputs a signal strength level of the received
signal;

computer readable code which latches the output of the computer readable
code which outputs a signal strength level responsive to setting of the flag; and

10 computer readable code which sets the carrier drop detection threshold to a
value a predetermined amount below the latched output responsive to setting of the flag.

31. A computer program product according to Claim 30 wherein the
computer readable code which outputs a signal strength level of the received signal outputs a
magnitude.

32. A computer program product according to Claim 30 wherein the
computer readable code which outputs a signal strength level of the received signal outputs an
energy level.

33. A computer program product according to Claim 32 wherein the
computer readable code which sets further comprises computer readable code which sets the
carrier drop detection threshold to a level about 4 dB below the latched output responsive to
setting of the flag.

34. A computer program product according to Claim 30 wherein the
computer readable code which detects a carrier drop further comprises computer readable

code which detects a carrier drop corresponding to a silence transmission terminating a V.8 standard phase 1 and further comprising computer readable code which conditions the modem to receive a phase 2 INFO0 signal.

5

35. A computer program product according to Claim 34 wherein the computer readable code which conditions further comprises computer readable code which starts a differential phase shift keyed (DPSK) receiver that receives the INFO0 signal.

36. A computer program product according to Claim 30 wherein the computer readable code which sets a flag further comprises computer readable code which sets a predetermined memory location as the flag.

37. A computer program product according to Claim 30 wherein the computer readable code which sets a flag further comprises computer readable code which sets a latch output line to an active state.

METHODS, SYSTEMS AND COMPUTER PROGRAM PRODUCTS FOR CARRIER DROP DETECTION USING A VARIABLE THRESHOLD

5

Abstract of the Disclosure

10

15

Methods, systems and computer program products are provided which utilize a variable threshold for carrier drop detection. The carrier drop detection threshold is updated based on a recognized data sequence contained within the signal received by the modem. The received signal is demodulated to obtain the signal data and an updated threshold is latched when a desired data sequence is recognized in the demodulated data. Accordingly, the threshold may be updated and set as an offset from or a percentage of the carrier signal level at the time of receipt of the desired data sequence. For example, in a V.90 modem using a V.8 phase 1 sequence, receipt of the CM signal (for the answer modem) or the JM signal (for the call modem) may be used to latch an updated level for the carrier drop detection threshold, which may then be used for detecting carrier drop during the silence transmission at the end of phase 1 to allow reliable preparation of the modem for receipt of the INFO0 signal at the start of phase 2.

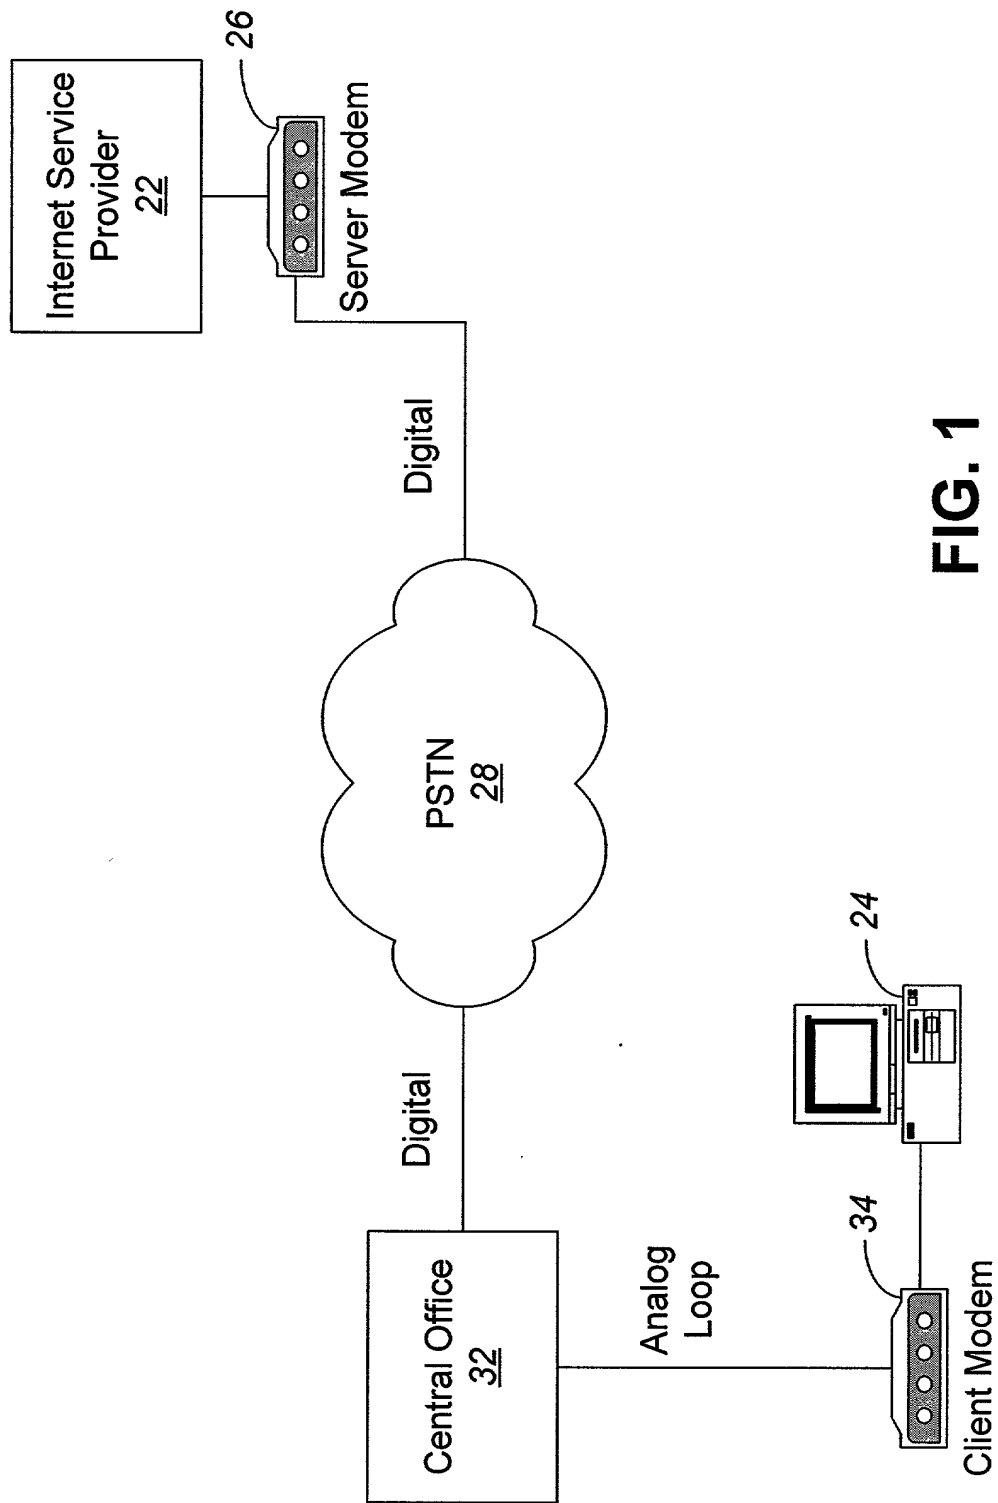


FIG. 1
(PRIOR ART)

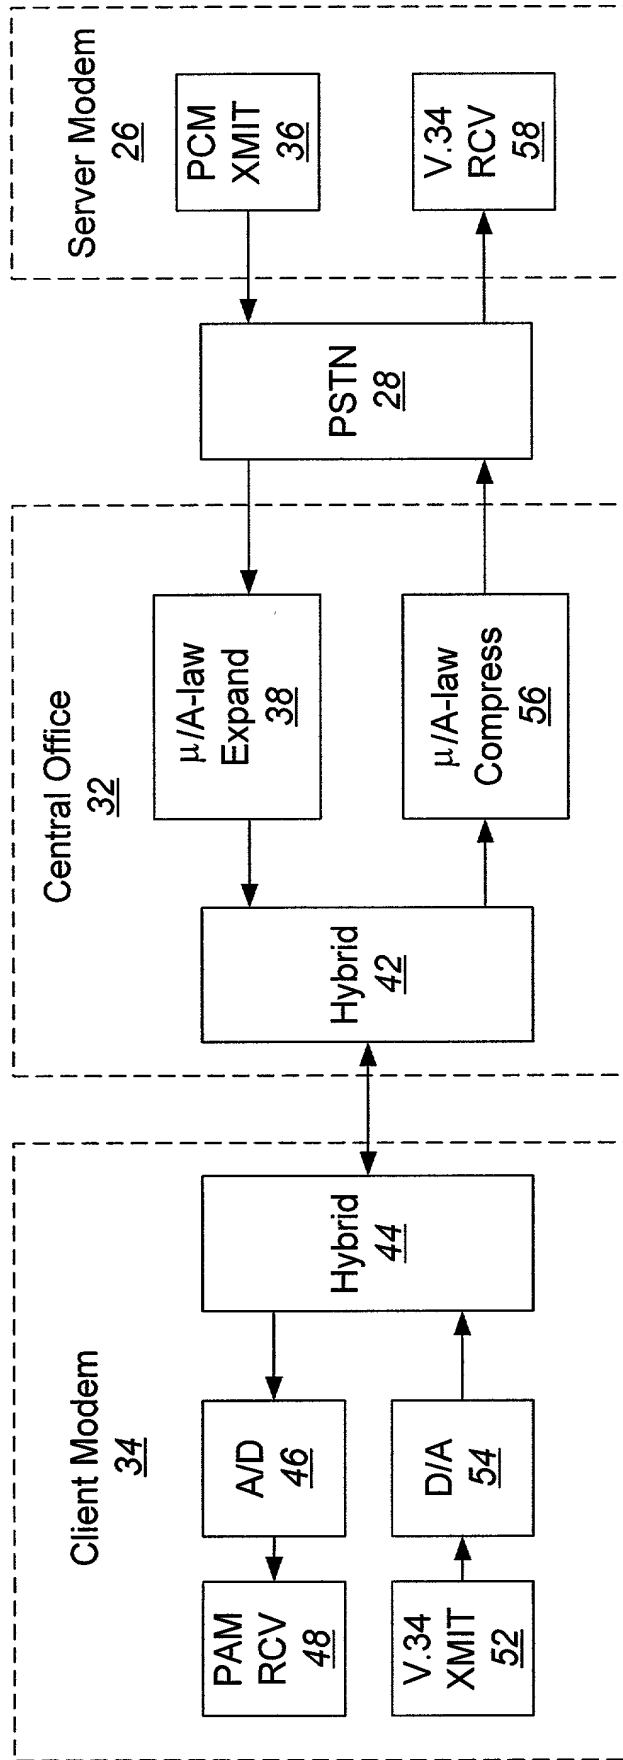


FIG. 2
(PRIOR ART)

**FIG. 3**

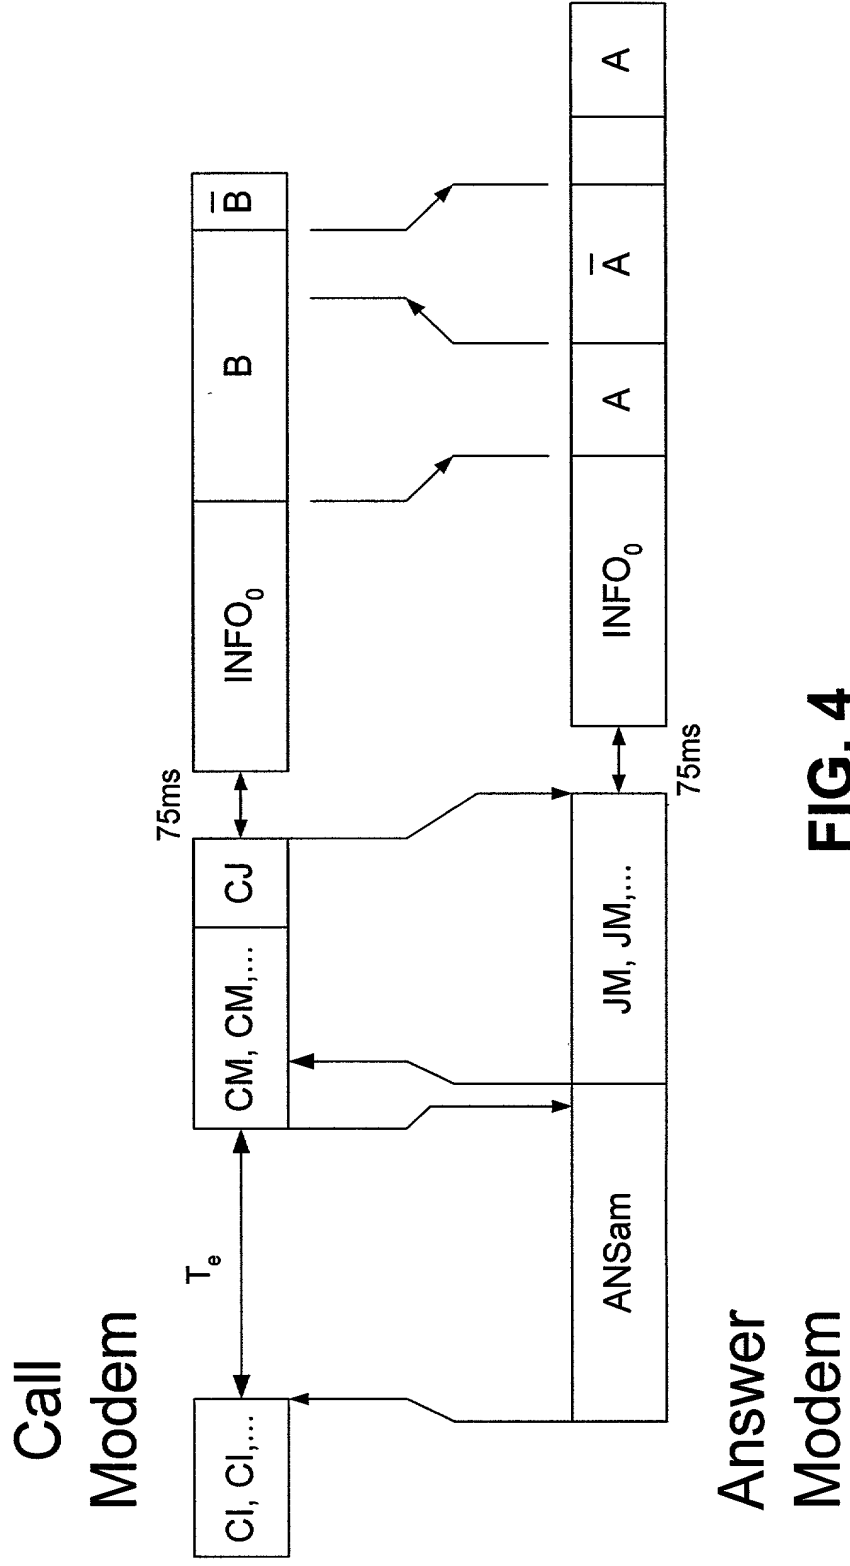


FIG. 4

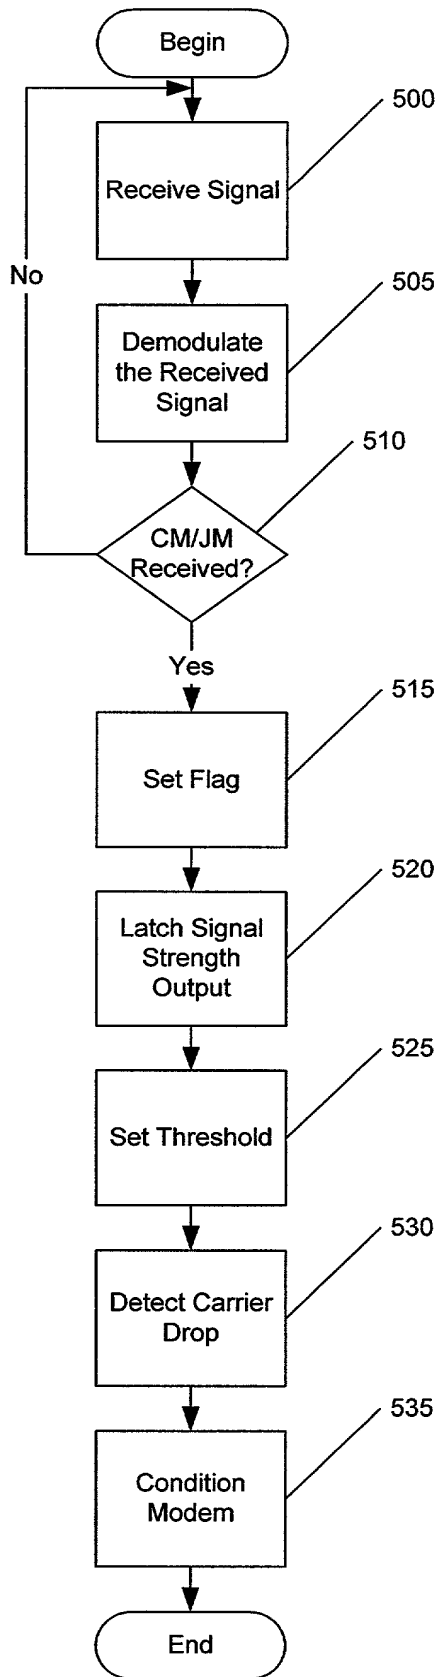


FIG. 5

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Attorney Docket No. RAL9-99-0110/4269-83

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHODS, SYSTEMS AND COMPUTER PROGRAM PRODUCTS FOR CARRIER DROP DETECTION USING A VARIABLE THRESHOLD

the specification of which

☒ [X] is attached hereto

OR

☐ [] was filed on as United States Application No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or of any PCT International application having a filing date before that of the application on which priority is claimed.

None			<input type="checkbox"/> [] Yes <input type="checkbox"/> [] No
Number	Country	MM/DD/YYYY Filed	Priority Claimed
			<input type="checkbox"/> [] Yes <input type="checkbox"/> [] No
Number	Country	MM/DD/YYYY Filed	Priority Claimed
			<input type="checkbox"/> [] Yes <input type="checkbox"/> [] No
Number	Country	MM/DD/YYYY Filed	Priority Claimed

RAL9-99-0110

ENGLISH LANGUAGE DECLARATION CONTINUED

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

None	
Application Number(s)	Filing Date (MM/DD/YYYY)
Application Number(s)	Filing Date (MM/DD/YYYY)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application (37 C.F.R. § 1.63(d)).

None		
Appln. Serial No.	Filing Date	Status Patented/Pending/Abandoned
Appln. Serial No.	Filing Date	Status Patented/Pending/Abandoned
Appln. Serial No.	Filing Date	Status Patented/Pending/Abandoned

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

ENGLISH LANGUAGE DECLARATION CONTINUED

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following registered attorney(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Joscelyn G. Cockburn
Registration No. 27,069

John D. Flynn
Registration No. 35,137

John E. Hoel
Registration No. 26,279

Christopher A. Hughes
Registration No. 26,914

Daniel E. McConnell
Registration No. 20,360

Edward A. Pennington
Registration No. 32,588

Joseph C. Redmond, Jr.
Registration No. 18,753

Horace St. Julian
Registration No. 30,329

Gerald R. Woods
Registration No. 24,144

Mitchell S. Bigel
Registration No. 29,615

Robert W. Glatz
Registration No. 36,811

D. Scott Moore
Registration No. 42,011

Timothy J. O'Sullivan
Registration No. 35,632

Send correspondence to:

John D. Flynn
IBM Corp., IP Law
Department 972/Building 656
Post Office Box 12195
Research Triangle Park, NC 27709

Direct telephone calls to:

John D. Flynn
(919) 543-4710

Facsimile:

(919) 543-3634

Full name of first inventor: **Dongming Hwang**

Inventor's

Signature: *Dongming Hwang* Date: 10/27/99

Residence:

Cary, North Carolina

Citizenship:

Taiwan

Post Office Address:

210 Hunters Crossing
Cary, North Carolina 27511

RAL9-99-0110

ENGLISH LANGUAGE DECLARATION CONTINUED

Full name of second inventor: **Robert John Schule**

Inventor's
Signature: Robert John Schule Date: October 27, 1999

Residence: Cary, North Carolina

Citizenship: United States of America

Post Office Address: 122 Covington Square Drive
Cary, North Carolina 27513

SECRET F0508780

186	187	188	189	190	191	192	193	194	195
196	197	198	199	200	201	202	203	204	205
206	207	208	209	210	211	212	213	214	215
216	217	218	219	220	221	222	223	224	225
226	227	228	229	230	231	232	233	234	235
236	237	238	239	240	241	242	243	244	245
246	247	248	249	250	251	252	253	254	255
256	257	258	259	260	261	262	263	264	265
266	267	268	269	270	271	272	273	274	275
276	277	278	279	280	281	282	283	284	285
286	287	288	289	290	291	292	293	294	295
296	297	298	299	300	301	302	303	304	305
306	307	308	309	310	311	312	313	314	315
316	317	318	319	320	321	322	323	324	325
326	327	328	329	330	331	332	333	334	335
336	337	338	339	340	341	342	343	344	345
346	347	348	349	350	351	352	353	354	355
356	357	358	359	360	361	362	363	364	365
366	367	368	369	370	371	372	373	374	375
376	377	378	379	380	381	382	383	384	385
386	387	388	389	390	391	392	393	394	395
396	397	398	399	400	401	402	403	404	405
406	407	408	409	410	411	412	413	414	415
416	417	418	419	420	421	422	423	424	425
426	427	428	429	430	431	432	433	434	435
436	437	438	439	440	441	442	443	444	445
446	447	448	449	450	451	452	453	454	455
456	457	458	459	460	461	462	463	464	465
466	467	468	469	470	471	472	473	474	475
476	477	478	479	480	481	482	483	484	485
486	487	488	489	490	491	492	493	494	495
496	497	498	499	500	501	502	503	504	505
506	507	508	509	510	511	512	513	514	515
516	517	518	519	520	521	522	523	524	525
526	527	528	529	530	531	532	533	534	535
536	537	538	539	540	541	542	543	544	545
546	547	548	549	550	551	552	553	554	555
556	557	558	559	560	561	562	563	564	565
566	567	568	569	570	571	572	573	574	575
576	577	578	579	580	581	582	583	584	585
586	587	588	589	590	591	592	593	594	595
596	597	598	599	600	601	602	603	604	605
606	607	608	609	610	611	612	613	614	615
616	617	618	619	620	621	622	623	624	625
626	627	628	629	630	631	632	633	634	635
636	637	638	639	640	641	642	643	644	645
646	647	648	649	650	651	652	653	654	655
656	657	658	659	660	661	662	663	664	665
666									

Inventor's Signature: Malcolm Scott Ware Date: 10/27/99

Post Office Address: 4605 Gamelyn Walk
Raleigh, North Carolina 27612

[illegible]

Inventor's

Henry

Date:

10/27/99

Durham, North Carolina

Republic of China

3912 Springstop Lane
Durham, North Carolina 27705